



**TELEDYNE PHOTOMETRICS**  
Everywhereyoulook™

Long Exposure Optimized CMOS Camera

**E7**  
**RETIGA**




7 Megapixel cooled CMOS  
Low readout and thermal noise  
Optimized for long exposures  
Capable of up to 51 fps

Specifications	Camera Performance
Sensor	CMOS Sensor
Active Array Size	3200 x 2200 (7.1 Megapixel)
Pixel Area	4.5 $\mu\text{m}$ x 4.5 $\mu\text{m}$
Sensor Area	14.4 mm x 10 mm 17.6 mm diagonal
Peak QE%	>77%
Readout Mode	Global Shutter
Digital Binning	2x2 on chip binning, 4x4 digital binning
Linearity	>99%
Cooling Options	Air Cooled to -20 Celsius

Camera Modes			
Specifications	Long Exposure	Fast Capture	HDR
Bit-Depth	12-bit	12-bit	16-bit
Full Frame Rate	3.2 fps	51 fps	TBD
Read Noise		Low gain: 2.1 $e^-$ High gain: 4.8 $e^-$	TBD
Dark current	0.02 $e^-/\text{pixel}/\text{sec}$	0.1 $e^-/\text{pixel}/\text{sec}$	0.02 $e^-/\text{pixel}/\text{sec}$
Conversion Gain		Low gain: 2.2 $e^-/\text{count}$ High gain: 4.9 $e^-/\text{count}$	TBD
Full well capacity		19,000 $e^-$	TBD

Specification	Camera Interface
Digital Interface	USB 3.2 (10 Gbps)
Lens Interface	C-Mount
Mounting Points	2x 1/4"-20 TPI mounting points per side

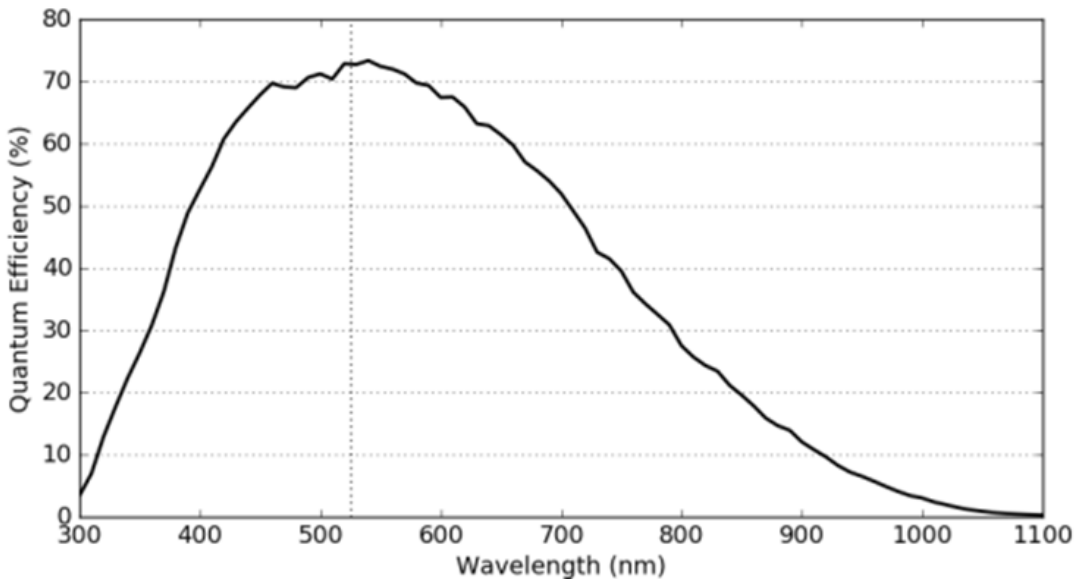

- 
- Accessories (Included)**
- 
- USB 3.2 Cable and Card
  - Trigger Cable
  - Power Supply
  - Quickstart Guide
- 

**Frame Rate**

	Long Exposure	Fast Capture	HDR mode
Bit Depth	12	12	16
Full FPS	3.2	51.4	TBD

Teledyne Photometrics is a registered trademark. Retiga R7 a trademark of Teledyne Photometrics. All other brand and product names are the trademarks of their respective owners.

Specifications in this datasheet are subject to change. Refer to the Teledyne Photometrics website for most current specifications.



[www.photometrics.com](http://www.photometrics.com)  
[photometrics.info@teledyne.com](mailto:photometrics.info@teledyne.com)/ tel: +1 520.889.9933



**TELEDYNE IMAGING**  
 Everywhereyoulook™